

Role of Optical Density of States in Two-mode Optomechanical Cooling

Seunghwi Kim and Gaurav Bahl*

*Department of Mechanical Science and Engineering,
University of Illinois at Urbana-Champaign, Urbana, IL 61801, USA*

(Dated: July 28, 2016)

Dynamical back-action cooling of phonons in optomechanical systems having one optical mode is well studied. Systems with two optical modes have the potential to reach significantly higher cooling rate through resonant enhancement of both pump and scattered light. Here we experimentally investigate the role of dual optical densities of states on optomechanical cooling, and the deviation from theory caused by thermal locking to the pump laser. Using this, we demonstrate a room temperature system operating very close to the strong coupling regime, where saturation of cooling is anticipated.

PACS numbers: 42.50.-p, 42.50.Wk, 07.10.Cm

The cooling of nanomechanical resonators is important for exploring the quantum behavior of mesoscale systems, high precision metrology [1–3], and quantum computing [4, 5]. Developments in laser induced passive optical feedback cooling [6] and dynamical back-action cooling via ponderomotive forces [7–9] have enabled access to the mechanical ground state [10–12] and the exploration of quantum mechanical effects [13]. The cooling rate achievable by such optomechanical mechanisms depends on the optical density of states (DoS) available for light-scattering and also increases with the intensity of the cooling laser [14]. Resonant enhancement of the pump, for instance through two-mode optomechanics, can thus increase the cooling rate by enhancing the number of intracavity photons. Such two-mode systems have enabled experimental demonstration of phonon lasing [15, 16], cooling [17], induced transparency [18] and are even theoretically predicted to allow access to the strong coupling regime [19, 20].

Let us consider a general optomechanical system having two optical modes; the lower mode ω_1 hosts the resonantly enhanced pump laser, while the higher mode ω_2 hosts anti-Stokes scattered light. These two optical modes are coupled by a phonon mode of frequency Ω_B with the relation $\Omega_B \approx \omega_2 - \omega_1$. There are now two possibilities for the momentum associated with this phonon mode. In conventional optomechanical cooling the resonator supports standing-wave phonons, such as in a breathing mode, having zero momentum $q_B = 0$. Alternatively, a whispering gallery resonator may support a traveling wave phonon mode with non-zero momentum $q_B \neq 0$. For phase matching either process, momentum conservation $k_1 + q_B = k_2$ is necessary, which we illustrate in general in Fig. 1. When the phase matching condition is satisfied, resonant pump light can scatter into the anti-Stokes optical mode (ω_2, k_2) while annihilating phonons from the system. Stokes scattering is simultaneously suppressed since no suitable optical mode is available. This leads to the insight that the resolved sideband regime could also be achieved in momentum space, even

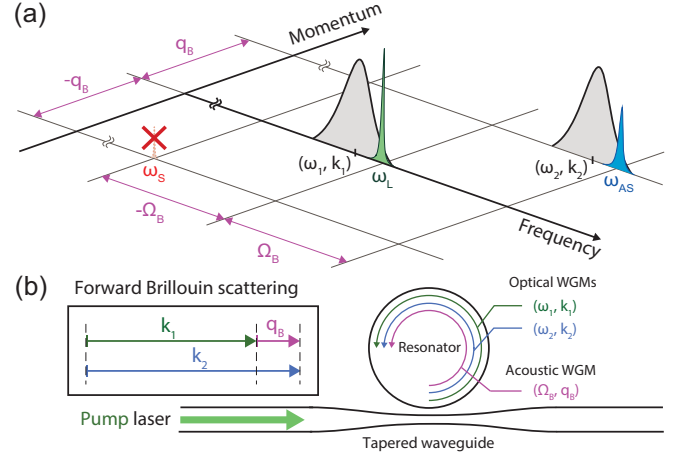


FIG. 1. (a) Generalized modal arrangement (phase matching diagram) required for dynamical back-action cooling of a (Ω_B, q_B) phonon mode in a resonator supporting two optical modes (ω_1, k_1) and (ω_2, k_2) . Phase matching necessitates consideration of both frequency and momentum separation. Here ω_L and $\omega_{AS}(\omega_S)$ denote the frequencies of pump laser and the anti-Stokes (Stokes) scattered light. Stokes scattered light does not have a supporting optical mode and is thus suppressed. (b) Our experiments are performed in a whispering gallery microresonator that is optically coupled using a tapered fiber waveguide. Optomechanical cooling of an acoustic whispering gallery mode (WGM) having nonzero momentum $q_B \neq 0$ is achieved by means of forward Brillouin scattering.

if the optical modes are not resolved in frequency space, enabling cooling with high fidelity selection of only anti-Stokes scattering.

The existence of two-mode systems with $q_B \neq 0$ phonon modes was experimentally verified recently [16]. Optomechanical cooling in these systems has been experimentally demonstrated [17] and also theoretically analyzed [21, 22]. However, the expected role of optical DoS in the cooling process has not been experimentally investigated. In this work, we study the dependence of cooling rate on both pump and anti-Stokes optical DoS using the Brillouin opto-acoustic cooling system [17] using a silica

whispering gallery resonator. We analyze the role of thermal locking [23] and also discuss through experiment the potential of reaching the strong coupling regime.

Our experiments are performed in a whispering gallery resonator of optical $Q > 10^8$ with a diameter of about $150 \mu\text{m}$ as shown in schematics Fig. 1(b) and Fig. 2(a). This device hosts two optical modes (ω_1, k_1) and (ω_2, k_2) that are phase-matched by a traveling phonon mode (Ω_B, q_B) . The configuration of the optical modes is shown in $\omega - k$ space in Fig. 1(a). The resonator modes in consideration have loss rates $\kappa_1/2\pi = 1.6 \text{ MHz}$ and $\kappa_2/2\pi = 1.5 \text{ MHz}$, while the phonon mode is at $\Omega_B/2\pi = 260.9 \text{ MHz}$ with loss rate $\Gamma_B/2\pi = 31.3 \text{ kHz}$. Thus, our system is in the resolved sideband regime ($\Omega_B \gg \kappa_1, \kappa_2$). An external cavity diode laser (ECDL) tunable over the C-band is used to pump the system. In this experiment we pump near 1555 nm with 1.1 mW launched in the waveguide. Light is coupled to the resonator via tapered optical fiber with external coupling rate κ_{ex} to the resonator optical modes (Fig. 1(b)). The pump is tuned to the (ω_1, k_1) mode while spontaneous anti-Stokes scattering occurs to the (ω_2, k_2) mode. As shown in Fig. 1(a), Stokes scattering is simultaneously suppressed since no suitable optical mode is available. Forward scattered optical power from the resonator couples out via the tapered fiber and can be measured on a forward photodetector; low-frequency transmission measurement shows the optical modes, while high-frequency measurement provides the frequency offset between pump and spontaneously scattered light. An electro-optic modulator (EOM) is used to generate a probe sideband, using which a network analyzer can monitor the detuning $\Delta_2 = (\omega_L + \Omega_B) - \omega_2$ between the scattered light and the (ω_2, k_2) mode by means of Brillouin scattering induced transparency (BSIT) [18]. This induced transparency is illustrated in the network analyzer inset of Fig. 2(a).

The spectrum of the photocurrent $S_{II}(\omega)$ generated by pump and scattered light that appears on the forward detector is related to the symmetrized spectral density of the phonon mode $\overline{S}_{bb}(\omega)$ [12, 24] via the relation

$$S_{II}(\omega) = N + \left(\frac{4\kappa_{\text{ex}}|g_0|^2\bar{n}_{\text{cav}}}{\kappa_2^2 + 4\Delta_2^2} \right) \overline{S}_{bb}(\omega) \quad (1)$$

where the parameter g_0 is the optomechanical single-photon coupling strength, $\bar{n}_{\text{cav}}$ is intracavity pump photon number in the (ω_1, k_1) mode, and N is the background noise floor. Thus, the measured RF spectrum S_{II} is a direct representation of the phonon mode spectrum $\overline{S}_{bb}(\omega)$ and is scaled according to the experimental parameters. To remove the dependence of this spectrum on the number of intracavity photons in the resonator $\bar{n}_{\text{cav}}$ and the anti-Stokes field detuning Δ_2 , we perform a normalization to obtain $\overline{S}_n(\omega) = \frac{(\kappa_2^2 + 4\Delta_2^2)}{4\kappa_{\text{ex}}|g_0|^2\bar{n}_{\text{cav}}} S_{II}(\omega)$ (Fig. 2(b)). This $\overline{S}_n(\omega)$ is then proportional to $\overline{S}_{bb}(\omega)$ but with an additional background noise floor. We

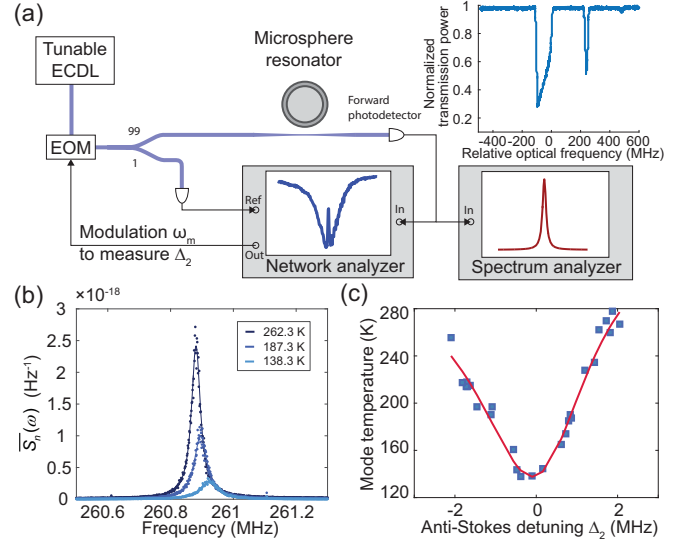


FIG. 2. (a) Experimental setup used for investigating role of optical DoS in Brillouin cooling. A fiber-coupled tunable external cavity diode laser (ECDL) generates the pump field which is tuned to the (ω_1, k_1) optical mode. The forward scattered signals are measured using a photodetector, electronic spectrum analyzer, and electronic network analyzer, using which the spectrum of the phonon mode and the anti-Stokes detuning Δ_2 can thus be quantified. Top-right inset shows a fiber-transmission measurement of the two optical modes (ω_1, k_1) and (ω_2, k_2) during a laser sweep. (b) The normalized phonon spectrum $\overline{S}_n(\omega)$ exhibits a cooling trend with increasing the pump laser. Solid lines are Lorentzian fits to the data. (c) The mode temperature T_{eff} is presented as a function of Δ_2 . It shows that the cooled mode temperature does not follow a symmetric Lorentzian-type curve, which is indicative that the pump optical density of states also affects the cooling.

can then quantify the effective temperature T_{eff} of the phonon mode by fitting its spectral linewidth Γ_e , and using the relation $T_{\text{eff}} = (\Gamma_B/\Gamma_e) T_b$, where T_b is the mechanical bath temperature (room temperature) and Γ_B is the intrinsic linewidth of the phonon mode [9]. We note that $\Gamma_e = \Gamma_B + \Gamma_{\text{opt}}$ where Γ_{opt} is the optomechanical damping rate. The linewidth-temperature relation is derived from the equipartition theorem $k_B T_{\text{eff}} = \int_{-\infty}^{\infty} m_e \omega_o^2 \overline{S}_{bb}(\omega) d\omega$ [6].

Since the pump and anti-Stokes optical fields have a well defined frequency offset Ω_B , the detuning of the anti-Stokes field from the cavity resonance Δ_2 can be simply modified by tuning the frequency of the pump. Figure 2(c) shows the measured effective temperature of the phonon mode T_{eff} as a function of Δ_2 . As we reduce Δ_2 from 2 MHz to 0 MHz, the mode reaches a final effective temperature of $T_{\text{eff}} \sim 138.3 \text{ K}$ starting from 290 K. As anticipated, the effective temperature rises again to 255 K as we continue detuning to -2 MHz since the anti-Stokes optical density of states (DoS) modifies the scattering efficiency. The defining cooling curve in Fig. 2(c) does not

follow a symmetric Lorentzian shape, since the pump detuning Δ_1 is simultaneously modified in this experiment. This result shows a clear evidence of the dependence of the Brillouin cooling effect on the optical DoS of both the pump and the anti-Stokes optical modes. The measurable mechanical frequency $\Omega_B/2\pi$ simultaneously tunes from 260.87 MHz to 260.96 MHz through the associated optical spring effect, as a function of detuning [25].

Let us now evaluate the characteristics of the phonon mode spectrum $\bar{S}_{bb}(\omega)$ under the influence of the cooling laser. The Hamiltonian formulation for such optomechanical systems with two optical modes has been presented previously [21, 22]. The resulting quantum Langevin equations enable derivation of the optomechanical damping rate Γ_{opt} as follows:

$$\Gamma_{\text{opt}} = \frac{4\kappa_2|g_0|^2\bar{n}_{\text{cav}}}{\kappa_2^2 + 4\Delta_2^2} \quad \text{where} \quad \bar{n}_{\text{cav}} = \frac{4\kappa_{\text{ex}}|\alpha_{\text{in}}|^2}{\kappa_1^2 + 4\Delta_1^2} \quad (2)$$

and where the pump detuning is $\Delta_1 = \omega_L - \omega_1$. Here $|\alpha_{\text{in}}|^2$ is the rate of pump photons arriving at the cavity from the waveguide. Clearly, both the pump and anti-Stokes detunings, Δ_1 and Δ_2 affect the optical damping. The optomechanical damping rate Γ_{opt} given in Eq. (2) leads us to envision a cooling scenario described in Fig. 3(c), where the cooling rate is dependent on detuning of the two optical signals to their respective modes (Δ_1, Δ_2). A Lorentzian cooling response is thus expected on both independent detuning axes. However, we know that the detuning parameters Δ_1 and Δ_2 are not independent, since the optical mode spacing and the phonon mode frequency are well determined. This is illustrated in Fig. 3(a) where the pump signal ω_L and anti-Stokes light ω_{AS} scan through the modes together since they must remain equidistant (the separation is defined by Ω_B).

In reality, however, ultra-high-Q resonators do exhibit significant thermal tuning in response to pumping even in the sub-milliwatt regime. This primarily takes the form of locking of the resonator mode to the pump laser [23], and is illustrated in Fig. 3(b). The result is that the intended pump detuning $\Delta_1^o = \omega_L - \omega_1$, i.e. the detuning from the original pump resonance (ω_1, k_1), does not generate a Lorentzian shaped cooling rate but instead traces out a skewed response Fig. 3(d). Experiments where measurable Brillouin cooling is to be observed require pump power in the > 10 microwatt regime, and fall under this latter category. As a result, the true pump detuning $\Delta_1 = \omega_L - \omega'_1$ for the locked mode at ω'_1 is always lower than the intended detuning $\Delta_1^o = \omega_L - \omega_1$.

Figure 4(a) shows the experimentally measured dependence of the optomechanical damping rate Γ_{opt} on the true pump detuning Δ_1 and the anti-Stokes detuning Δ_2 . To relate the measurement to Eq. (2), several experimental parameters are required. The intracavity photon number $\bar{n}_{\text{cav}}$ and the true pump detuning Δ_1 can be inferred by measuring the power ab-

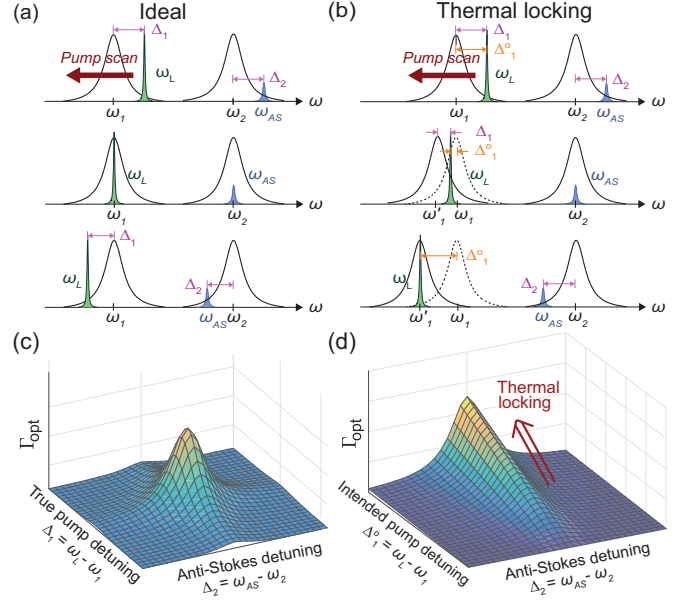


FIG. 3. The role of two optical DoS on the optomechanical damping rate Γ_{opt} . (a) Ideally, the pump (frequency ω_L) and anti-Stokes (frequency ω_{AS}) detuning track together due to the fixed acoustic mode frequency. (b) Practically, thermal locking of the pump to its host optical mode causes the true anti-Stokes detuning to vary faster than the true pump detuning. Δ_1^o is the intended detuning while Δ_1 is the true detuning. (c) Equation 2 predicts that Γ_{opt} is a Lorentzian function with respect to either of the true detunings Δ_1 and Δ_2 . (d) Due to thermal locking of the ω_1 optical mode to the pump laser, the true pump detuning Δ_1 does not track the intended pump detuning Δ_1^o (see (b)), resulting in a skewed cooling rate measured against Δ_1^o .

sorbed from the waveguide by the resonator. Specifically, $\Delta_1 = \sqrt{\frac{\kappa_1\kappa_{\text{ex}}}{4} \left(\frac{P_{\text{wg}}}{P_{\text{in}}} - \frac{\kappa_1}{\kappa_{\text{ex}}} \right)}$ where P_{wg} is the optical power in the waveguide and P_{in} is the optical power absorbed by the resonator. As mentioned above, the detuning Δ_2 can be directly measured using BSIT [18]. We can then predict the cooling rate Γ_{opt} based on Eq. (2) with all measurable parameters being known, except $g_0/2\pi = 2.6$ Hz which is extracted by fitting to the BSIT model. This prediction leads to the 3d surface shown in Fig. 4(a) and is in very good agreement with the experiment. Since both pump and anti-Stokes detuning change together (see Figs. 3(a),(b)), the results are not dependent only on one optical DoS, but are affected by both simultaneously. As predicted, the true pump detuning varies far less than the anti-Stokes detuning due to thermal locking of the pump optical mode.

We can now attempt to independently characterize the role of the optical DoS of either optical mode. This can be achieved by describing normalized cooling rate $\zeta_1 = \Gamma_{\text{opt}}/\bar{n}_{\text{cav}}$, which is independent of the intracavity photon number $\bar{n}_{\text{cav}}$ and Δ_1 , and normalized cooling rate $\zeta_2 = \Gamma_{\text{opt}}(\kappa_2^2 + 4\Delta_2^2)$ which is independent of the

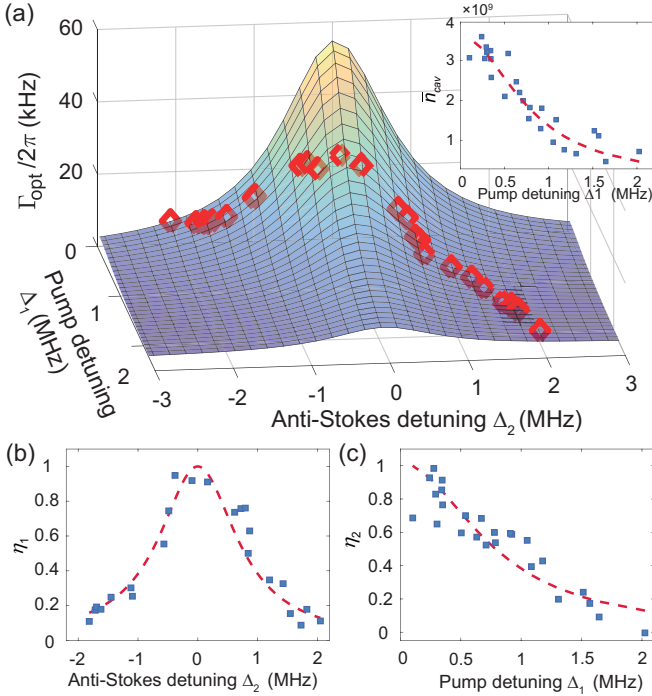


FIG. 4. (a) Data points (red diamonds) are the measured optomechanical damping rate Γ_{opt} a function of pump and anti-Stokes detuning Δ_1 and Δ_2 . The 3d surface is the predicted result based on Eq. (2), using the optomechanical single-photon coupling strength $g_0/2\pi = 2.6$ Hz. The inset shows the intracavity photon number $\bar{n}_{\text{cav}}$ with respect to Δ_1 , as deduced from Eq. (2). (b) Dependence of η_1 and (c) η_2 (see text) on anti-Stokes detuning Δ_2 and pump detuning Δ_1 , respectively. Red dashed lines are derived from Eq. (2).

anti-Stokes detuning Δ_2 . In addition, we define the dimensionless numbers $\eta_1 \triangleq \zeta_1/\zeta_{1,\text{max}}$ and $\eta_2 \triangleq \zeta_2/\zeta_{2,\text{max}}$ where $\zeta_{1,\text{max}}$ and $\zeta_{2,\text{max}}$ are the maximum value of ζ_1 and ζ_2 at resonances, i.e. at $\Delta_2 = 0$ and $\Delta_1 = 0$ respectively. In Fig. 4(b) we see that the normalized measurement η_1 exhibits clear Lorentzian dependence on the anti-Stokes detuning Δ_2 . This result is similar to what is expected from resolved-sideband optomechanical cooling [11]. Additionally, since we know the dependence of the intracavity photon number $\bar{n}_{\text{cav}}$ on pump detuning Δ_1 , we are able to plot (in Fig. 4(c)) the normalized measurement η_2 against the pump detuning Δ_1 directly, without being affected by the anti-Stokes mode detuning. There is thus a clear contribution of the DoS in both optical modes on the resulting phonon dissipation rate.

A special feature of two-mode optomechanical cooling systems is that the pump laser is resonant in the optical mode (ω_1, k_1) . These systems can thus support a very large amount of intracavity photons ($\bar{n}_{\text{cav}} > 10^9$) compared to what is achievable in single-mode optomechanics [10–12]. As a result, the ratio of the light-enhanced optomechanical coupling strength $G = g_0\sqrt{\bar{n}_{\text{cav}}}$ to the optical loss rate κ_2 can be increased significantly, imply-

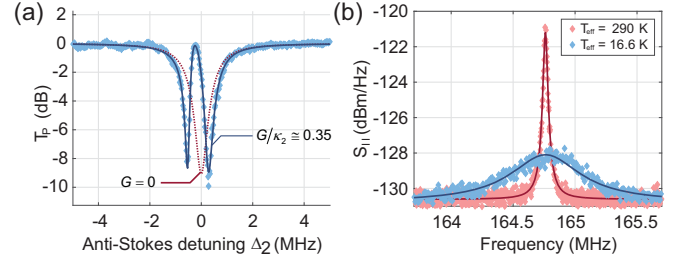


FIG. 5. (a) Transmission of a probe laser tuned the anti-Stokes optical mode (ω_2, k_2) is measured through the optical waveguide, while a fixed pump laser is tuned on the lower (ω_1, k_1) optical mode. The red-dotted line indicates the dip induced by absorption into the anti-Stokes mode without optomechanical coupling ($G \sim 0$) i.e. zero pump. For non-zero optomechanical coupling, an EIT-like induced transparency (mode splitting) appears in the (ω_2, k_2) mode due to destructive interference mediated by phonons [18]. The blue markers show experimental data while the blue-bold line shows the fit to theory. In this data, the ratio of the light-enhanced optomechanical coupling strength to the optical loss is $G/\kappa_2 \approx 0.35$, with $\kappa_2/2\pi = 1.1$ MHz. (b) The mechanical noise spectrum is measured at the photodetector S_{II} for acoustic mode frequency $\Omega_B/2\pi = 164.8$ MHz. The red data corresponds to phonon linewidth $\Gamma_B/2\pi = 33.9$ kHz measured under very low optical pumping at room temperature. The blue data corresponds to $G/\kappa_2 \approx 0.35$, and shows $\Gamma_B/2\pi = 592.3$ kHz (effective mode temperature of 16.6 K).

ing that two-mode systems could potentially reach the strong coupling regime where $G \geq \kappa_2$, even at room temperature. To explore this possibility, we arrange a system that has optical loss rates $\kappa_1/2\pi \approx \kappa_2/2\pi = 1.1$ MHz and acoustic loss rate $\Gamma_B/2\pi = 33.9$ kHz with mechanical frequency $\Omega_B/2\pi = 164.8$ MHz. Due to the optomechanical coupling, we anticipate the appearance of induced transparency in the anti-Stokes mode (ω_2, k_2) [18], which evolves into a mode splitting effect under strong coupling. Figure 5(a) shows an experimental observation of this induced mode splitting that is generated due to the large circulating pump power ($\bar{n}_{\text{cav}} = 10^{10}$) in the system. By fitting this observation to a mathematical model (Supplement of [18]) we can obtain $G/\kappa_2 \approx 0.35$, which is very close to the strong coupling regime. The observed linewidth of the phonon mode is shown in Fig. 5(b), both before and after cooling. We see that the effective linewidth broadens to $\Gamma_e/2\pi = 592.3$ kHz which is comparable to the optical loss rate of the anti-Stokes mode $\kappa_2/2\pi = 1.1$ MHz. This result corresponds to a final mode temperature of 16.6 K. The cooling rate is expected to saturate at the optical loss rate κ_2 when the system reaches the strong coupling regime [26, 27]. Here, the measured effective mode temperature is very close to the estimated saturation temperature of 8.9 K.

In summary, we provided experimental verification that Brillouin cooling is dependent on two optical DoS, of both pump and anti-Stokes optical resonances. Ad-

ditionally, we demonstrated that thermal locking of the pump laser causes the optomechanical damping rate Γ_{opt} to be asymmetric with respect to the laser detuning. Finally, we show that resonant enhancement of the pump in a two-mode optomechanical cooling system enhances the cooling rate significantly. Our room temperature experimental results show that the strong coupling regime is well within reach, and may also pave the way to exploration of exploration of the saturation regime and beyond-saturation cooling techniques [28].

The authors would like to thank JunHwan Kim and Yin-Chung Chen for helpful technical discussions. This research was supported by the US Army Research Office (grant W911NF-15-1-0588) and the US Air Force Office for Scientific Research (grant FA9550-14-1-0217).

* bahl@illinois.edu

- [1] J. D. Teufel, T. Donner, A. Castellanos-Beltran, M., J. W. Harlow, and K. W. Lehnert, *Nature Nanotech.* **4**, 820 (2009).
- [2] A. G. Krause, M. Winger, T. D. Blasius, Q. Lin, and O. Painter, *Nature Photon.* **6**, 768 (2012).
- [3] E. Gavartin, P. Verlot, and T. J. Kippenberg, *Nature Nanotech.* **7**, 509 (2012).
- [4] A. D. O'Connell, M. Hofheinz, M. Ansmann, R. C. Bialczak, M. Lenander, E. Lucero, M. Neeley, D. Sank, H. Wang, M. Weides, J. Wenner, J. M. Martinis, and A. N. Cleland, *Nature* **464**, 697 (2010).
- [5] M. Bagheri, M. Poot, M. Li, W. P. H. Pernice, and H. X. Tang, *Nature Nanotech.* **6**, 726 (2011).
- [6] C. H. Metzger and K. Karrai, *Nature* **432**, 1002 (2004).
- [7] O. Arcizet, P.-F. Cohadon, T. Briant, M. Pinard, and A. Heidmann, *Nature* **444**, 71 (2006).
- [8] S. Gigan, H. R. Bohm, M. Paternostro, F. Blaser, G. Langer, J. B. Hertzberg, K. C. Schwab, D. Bauerle, M. Aspelmeyer, and A. Zeilinger, *Nature* **444**, 67 (2006).
- [9] A. Schliesser, P. Del'Haye, N. Nooshi, K. J. Vahala, and T. J. Kippenberg, *Phys. Rev. Lett.* **97**, 243905 (2006).
- [10] A. Schliesser, R. Riviere, G. Anetsberger, O. Arcizet, and T. J. Kippenberg, *Nature Phys.* **4**, 415 (2008).
- [11] Y.-S. Park and H. Wang, *Nature Phys.* **5**, 489 (2009).
- [12] J. Chan, T. P. M. Alegre, A. H. Safavi-Naeini, J. T. Hill, A. Krause, S. Groblacher, M. Aspelmeyer, and O. Painter, *Nature* **478**, 89 (2011).
- [13] A. J. Leggett, *Journal of Physics: Condensed Matter* **14**, R415 (2002).
- [14] C. Genes, D. Vitali, P. Tombesi, S. Gigan, and M. Aspelmeyer, *Phys. Rev. A* **77**, 033804 (2008).
- [15] I. S. Grudinin, H. Lee, O. Painter, and K. J. Vahala, *Phys. Rev. Lett.* **104**, 083901 (2010).
- [16] G. Bahl, J. Zehnpfennig, M. Tomes, and T. Carmon, *Nat. Commun.* **2**, 403 (2011).
- [17] G. Bahl, M. Tomes, F. Marquardt, and T. Carmon, *Nature Phys.* **8**, 203 (2012).
- [18] J. Kim, M. C. Kuzyk, K. Han, H. Wang, and G. Bahl, *Nature Phys.* **11**, 275 (2015).
- [19] M. Ludwig, A. H. Safavi-Naeini, O. Painter, and F. Marquardt, *Phys. Rev. Lett.* **109**, 063601 (2012).
- [20] K. Stannigel, P. Komar, S. J. M. Habraken, S. D. Bennett, M. D. Lukin, P. Zoller, and P. Rabl, *Phys. Rev. Lett.* **109**, 013603 (2012).
- [21] M. Tomes, F. Marquardt, G. Bahl, and T. Carmon, *Phys. Rev. A* **84**, 063806 (2011).
- [22] G. S. Agarwal and S. S. Jha, *Phys. Rev. A* **88**, 013815 (2013).
- [23] T. Carmon, L. Yang, and K. J. Vahala, *Opt. Express* **12**, 4742 (2004).
- [24] A. A. Clerk, M. H. Devoret, S. M. Girvin, F. Marquardt, and R. J. Schoelkopf, *Rev. Mod. Phys.* **82**, 1155 (2010).
- [25] M. Hossein-Zadeh and K. J. Vahala, *Opt. Lett.* **32**, 1611 (2007).
- [26] J. M. Dobrindt, I. Wilson-Rae, and T. J. Kippenberg, *Phys. Rev. Lett.* **101**, 263602 (2008).
- [27] P. Rabl, S. J. Kolkowitz, F. H. L. Koppens, J. G. E. Harris, P. Zoller, and M. D. Lukin, *Nature Phys.* **6**, 602 (2010).
- [28] Y.-C. Liu, Y.-F. Xiao, X. Luan, and C. W. Wong, *Phys. Rev. Lett.* **110**, 153606 (2013).